


Introducing LongLine Crimp Sheets

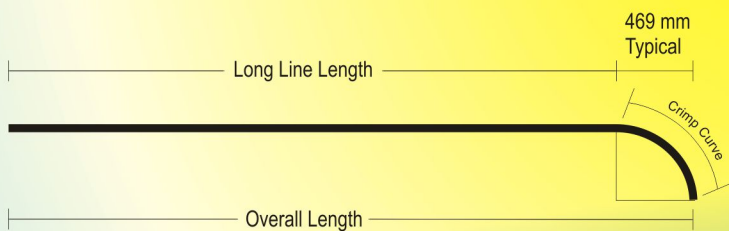

Material Specification				
Standard Thickness (mm) - 0.45 / 0.50 / 0.60				
Overall Length*		Long Line Length (mm)	Crimp Curve (mm)	Diagram
(feet)	(mm)			
8'	2440	1971	750	
10'	3050	2581	750	
12'	3660	3191	750	
14'	4270	3801	750	
16'	4880	4411	750	
18'	5490	5021	750	
20'	6100	5631	750	

* Sheet length in feet is approximate value




Benefits:

- ▶ No gutter required
- ▶ Single length in standard sheet




DURASHINE® LongLine Crimp Sheets


Typical Applications

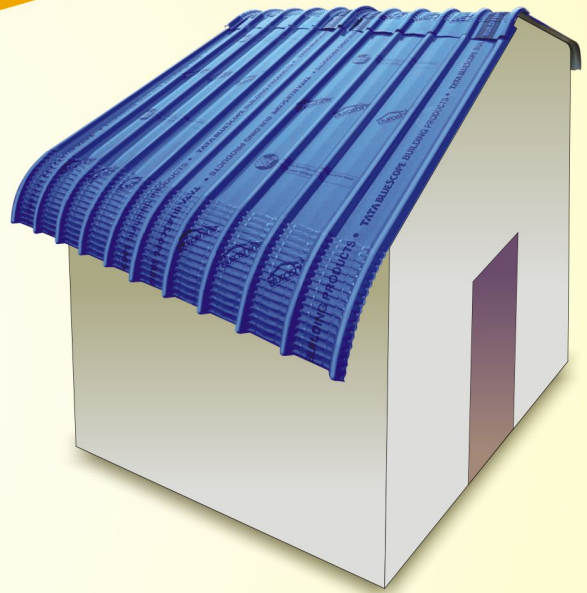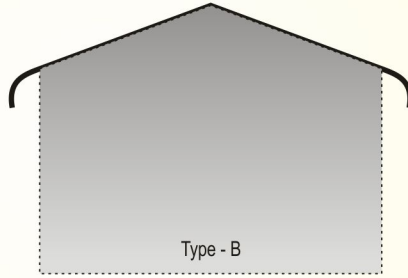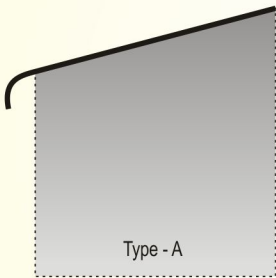

Typical Sheet Arrangement

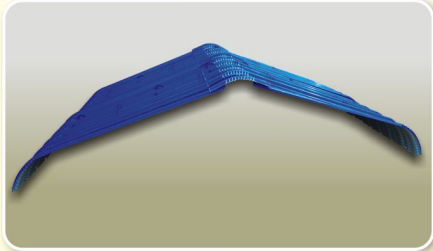

Double slope roof with crimp ridge

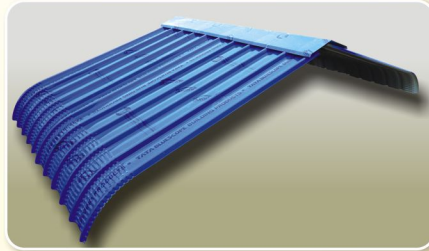

Double slope roof with plan ridge



Crimp ridge



Guard Film

DURASHINE® LongLine Crimp Sheets come with the added protection of the Guard Film. The film not only adds protection to the sheet during storage, handling and installation but also enables the customer to identify the DURASHINE® brand.

The guard film should be removed immediately on installation

Available
Standard
Colours*

Asian
White

Castle
Red

Passion
Red

Cherry
Red

Bright
Green

Pearl
Green

Cool
Blue

Ceilo
Blue

Nuvo
Blue

* The above colours are only for illustrative purpose and actual colours may vary



Dealer Name and Address

Tata BlueScope Building Products

The Metropolitan, 4th Floor, Final Plot. No. 27, S. No. 21,
Wakdevadi, Shivaji Nagar, Pune- 411005, INDIA.

Tel.: +91 20-6621-8051

Website: www.tatabluescopesteel.com

Email: durashine@tatabluescopesteel.com